


ADMINISTRATION BUILDING - ACTUAL DUCT JUNCTIONS - ENLARGED PLAN DETAILS


A GF-02 BRANCH / TWO HEADER LEGS / 1:20

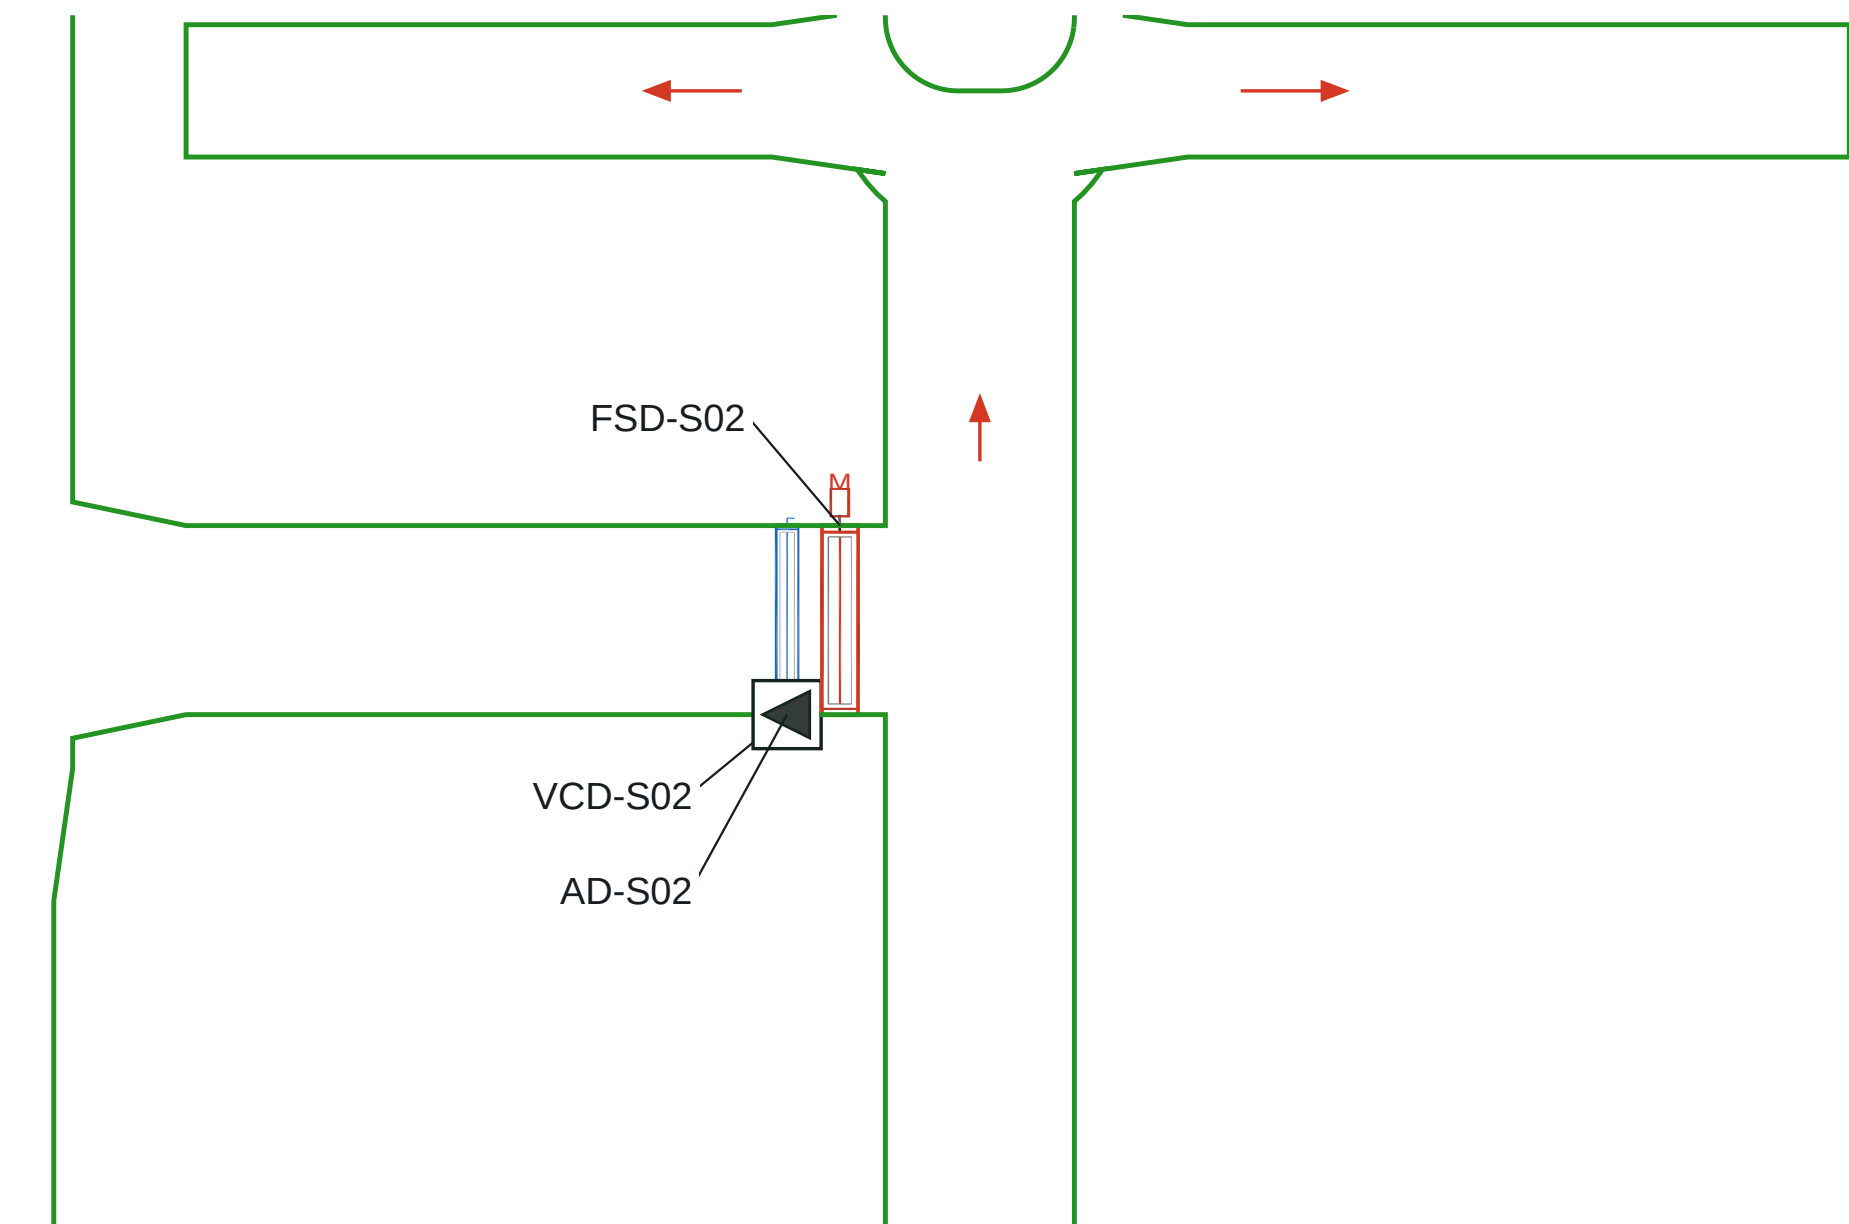

Actual Rev10 duct envelope; connected inside seams removed. Individual clear sizes and neck duties: Duct_sections / Terminals registers.

Formed fitting / access / face-to-face dimensions require selected manufacturer confirmation. Other services omitted in this enlargement; coordinate CX references on D-020.


B GF-02 END TEE / TWO INDIVIDUAL NECKS / 1:25

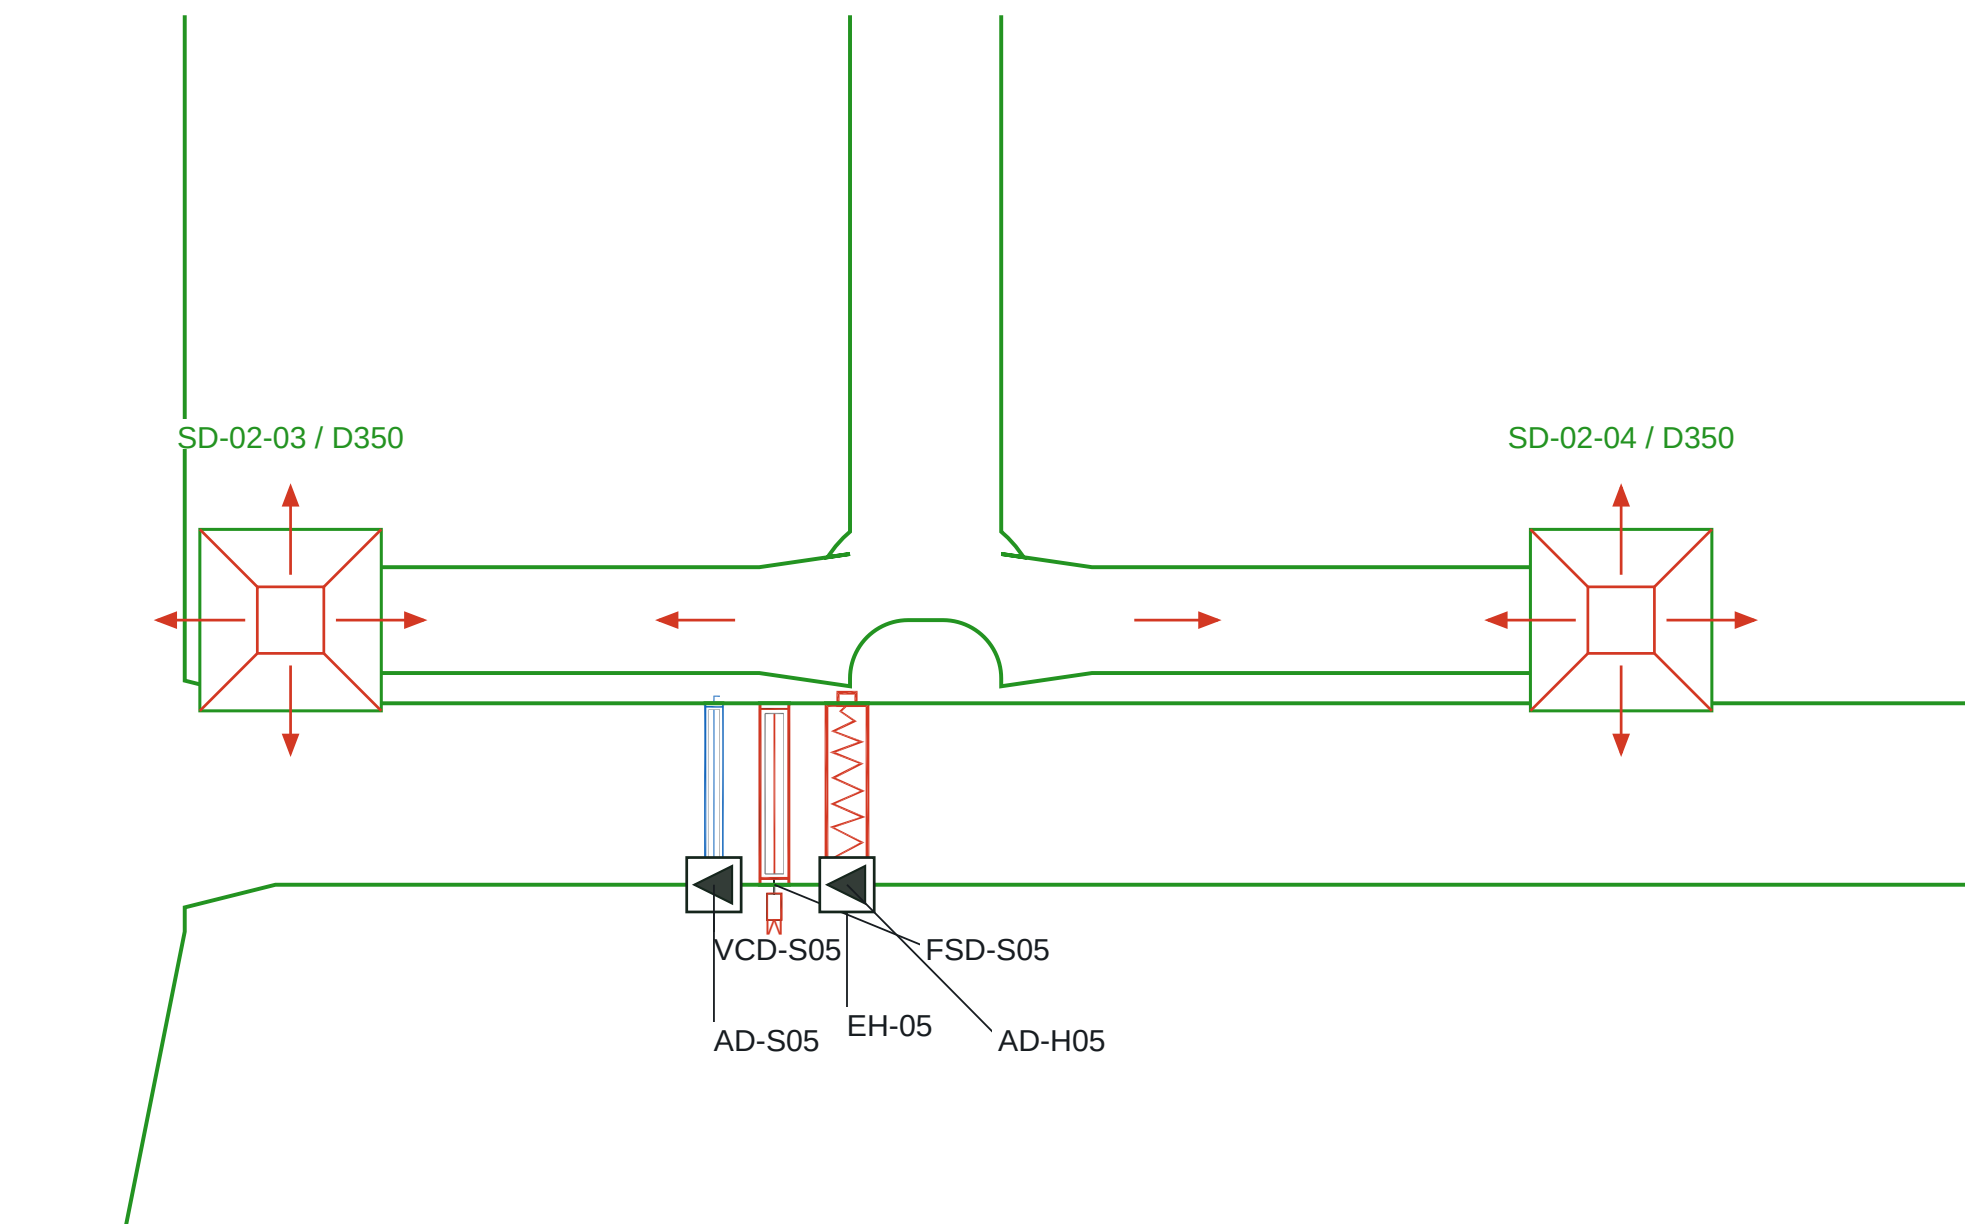

Actual Rev10 duct envelope; connected inside seams removed. Individual clear sizes and neck duties: Duct_sections / Terminals registers.

Formed fitting / access / face-to-face dimensions require selected manufacturer confirmation. Other services omitted in this enlargement; coordinate CX references on D-020.


C MEETING CONTINUING HEADER / SIDE NECK / 1:20

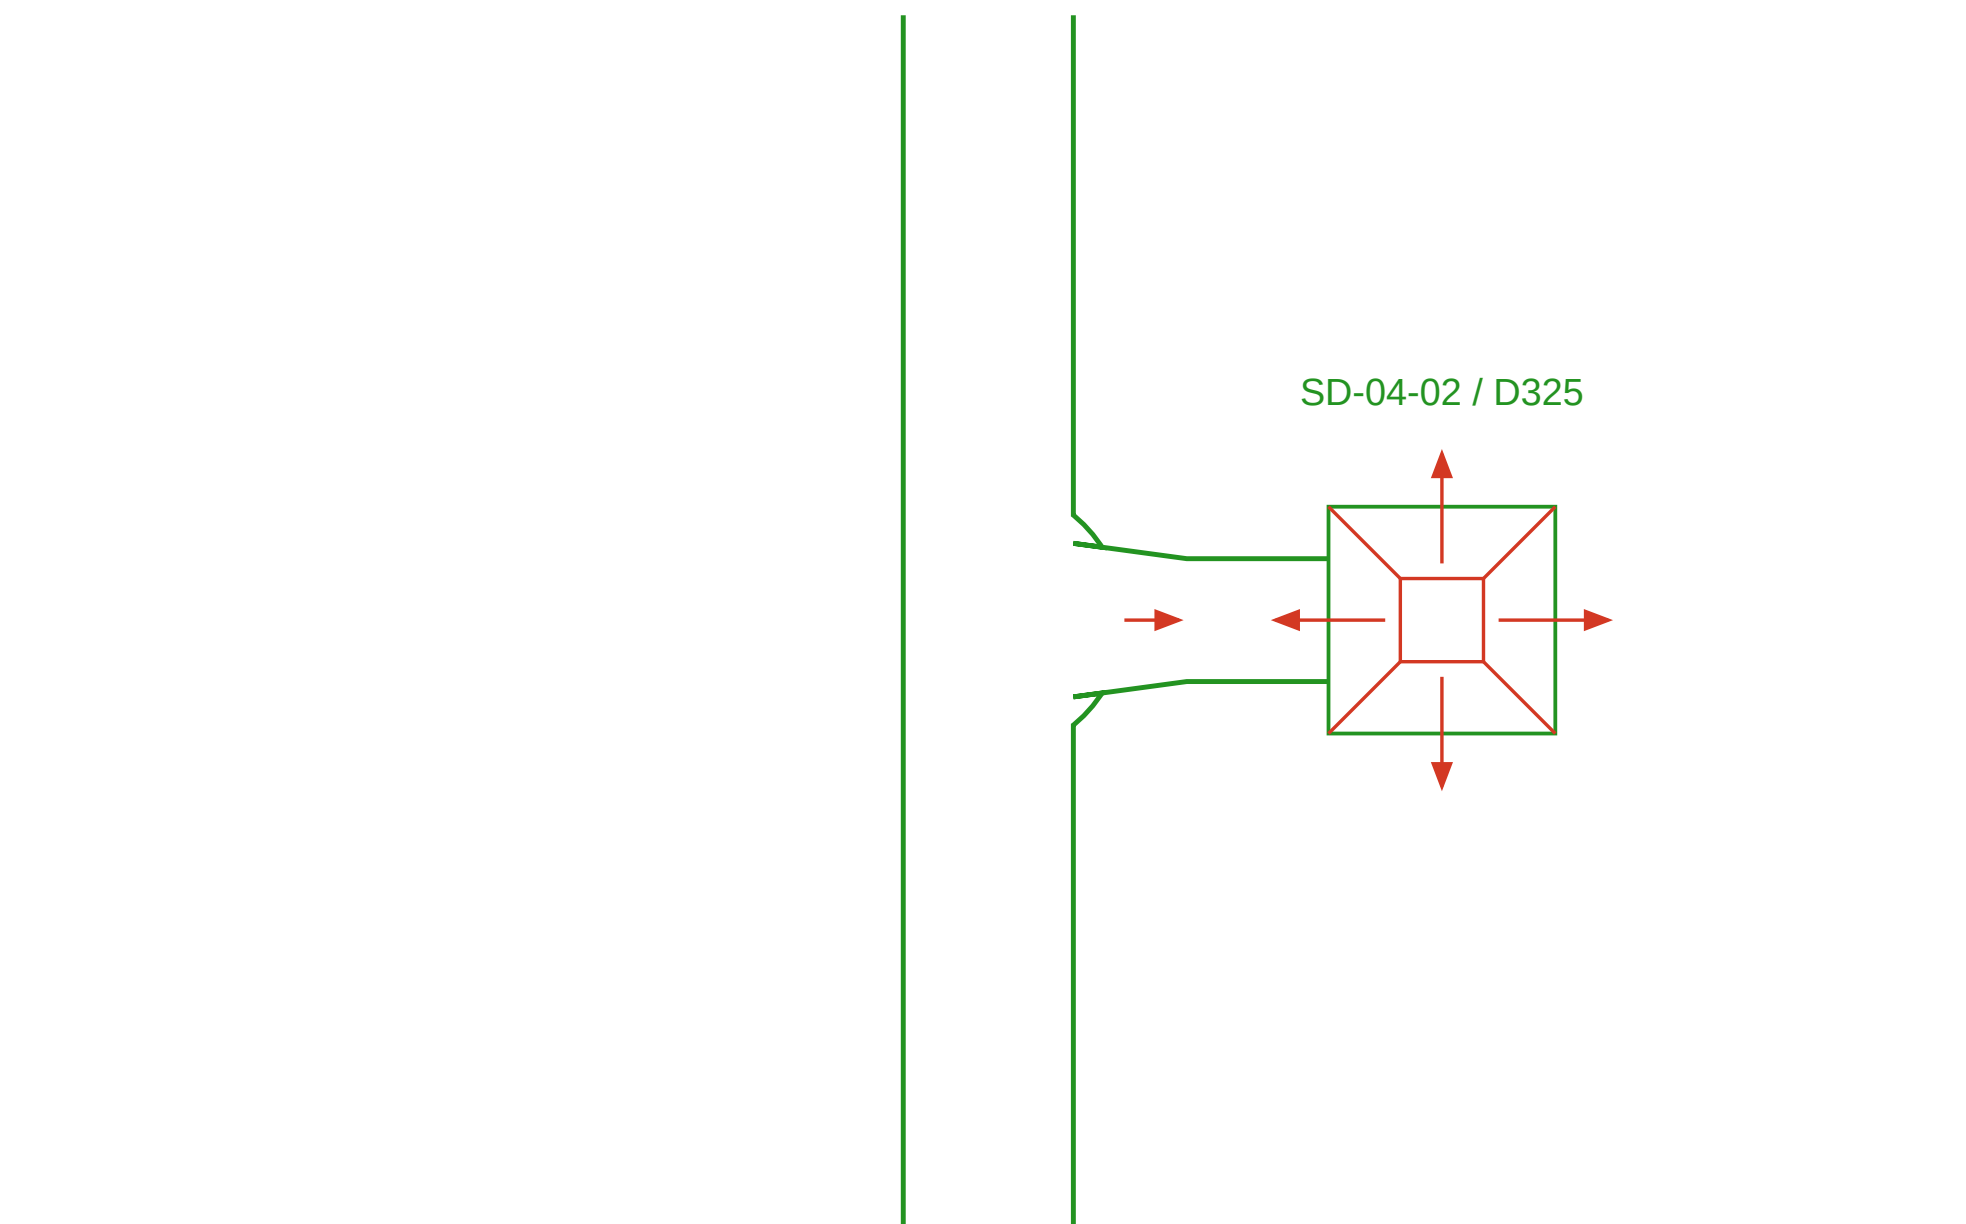

Actual Rev10 duct envelope; connected inside seams removed. Individual clear sizes and neck duties: Duct_sections / Terminals registers.

Formed fitting / access / face-to-face dimensions require selected manufacturer confirmation. Other services omitted in this enlargement; coordinate CX references on D-020.


D TELECOM FEEDER / UP AND DOWN HEADERS / 1:20

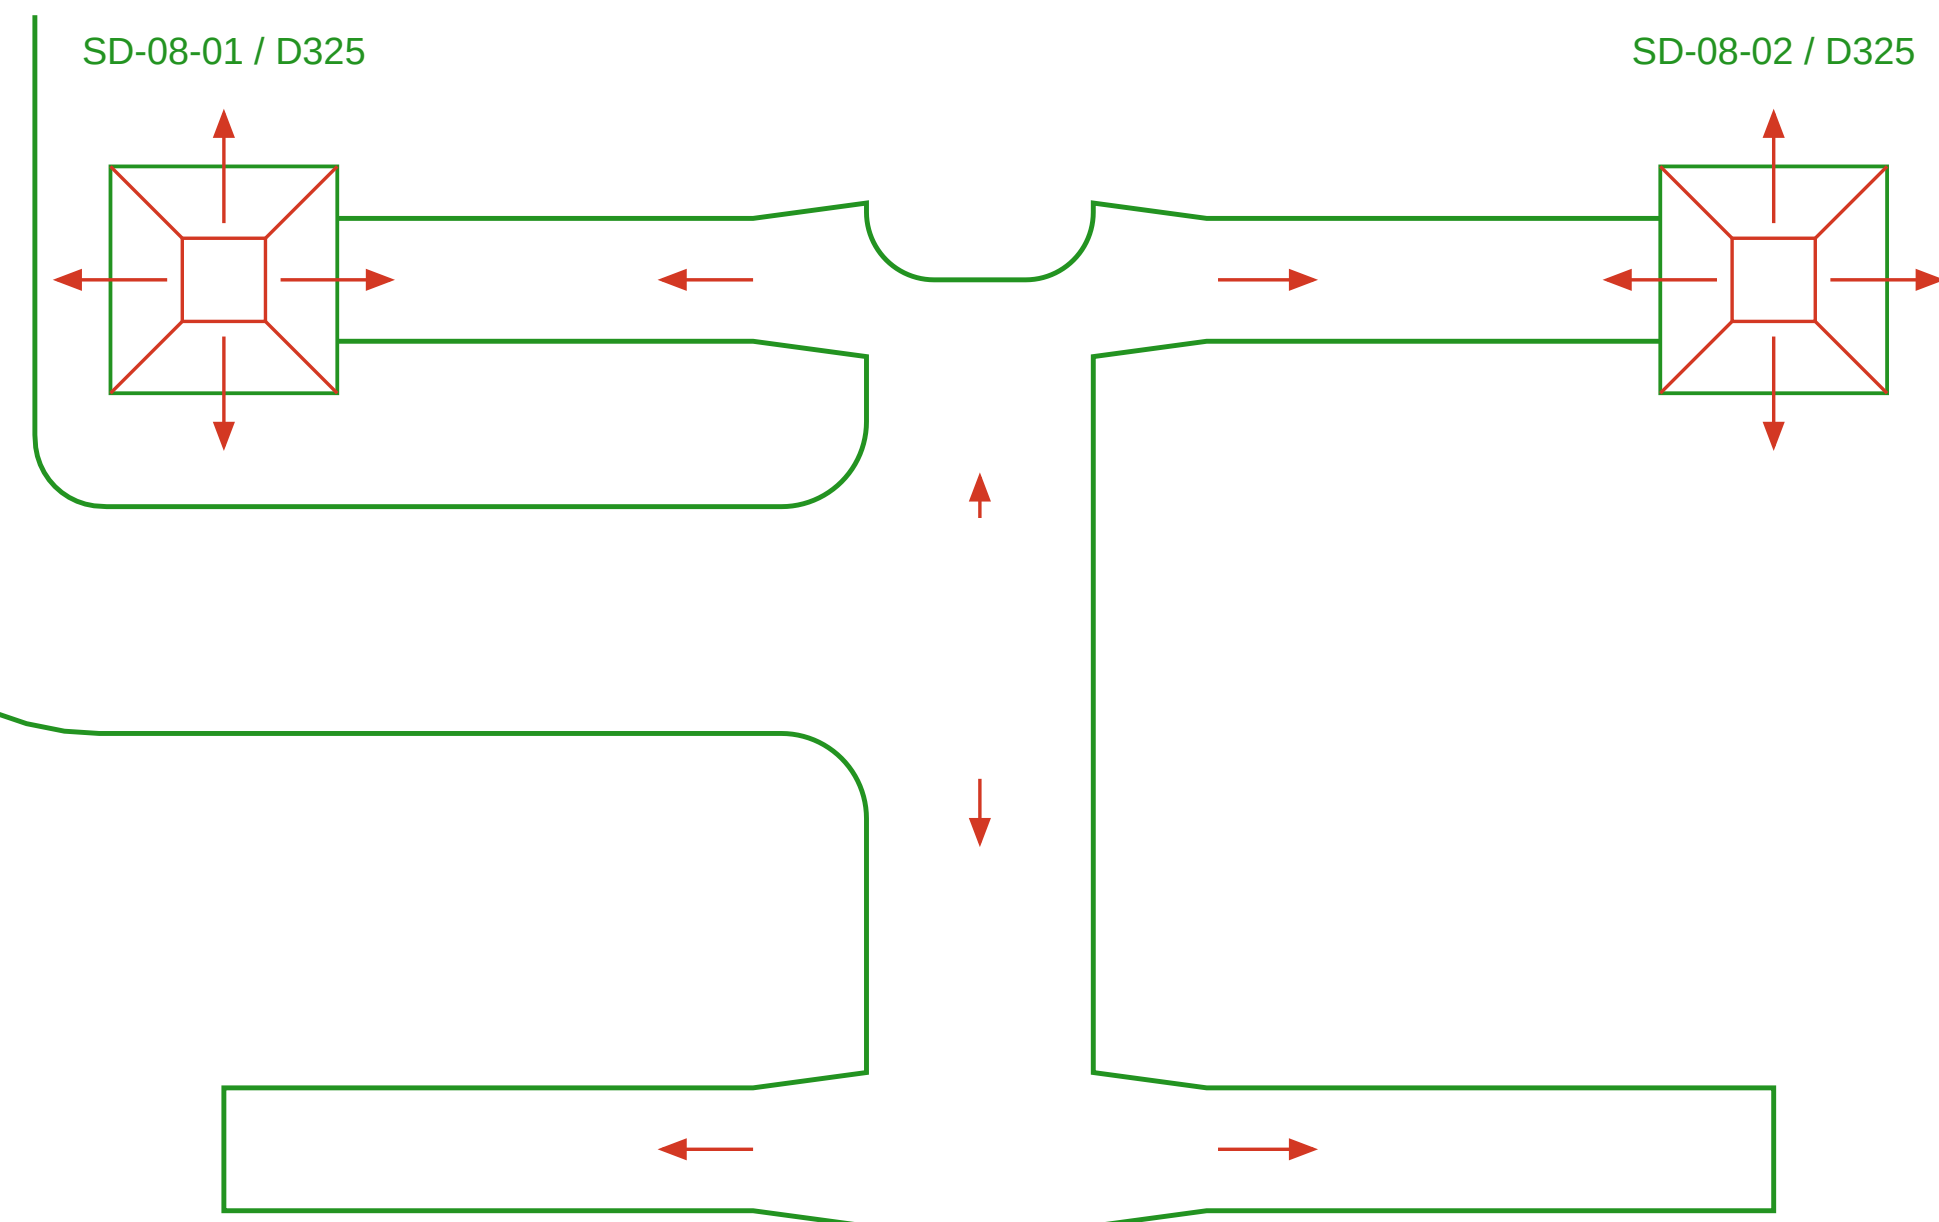

Actual Rev10 duct envelope; connected inside seams removed. Individual clear sizes and neck duties: Duct_sections / Terminals registers.

Formed fitting / access / face-to-face dimensions require selected manufacturer confirmation. Other services omitted in this enlargement; coordinate CX references on D-020.


E CORRIDOR COMMON BRANCH / HEATER / HEADER / 1:20

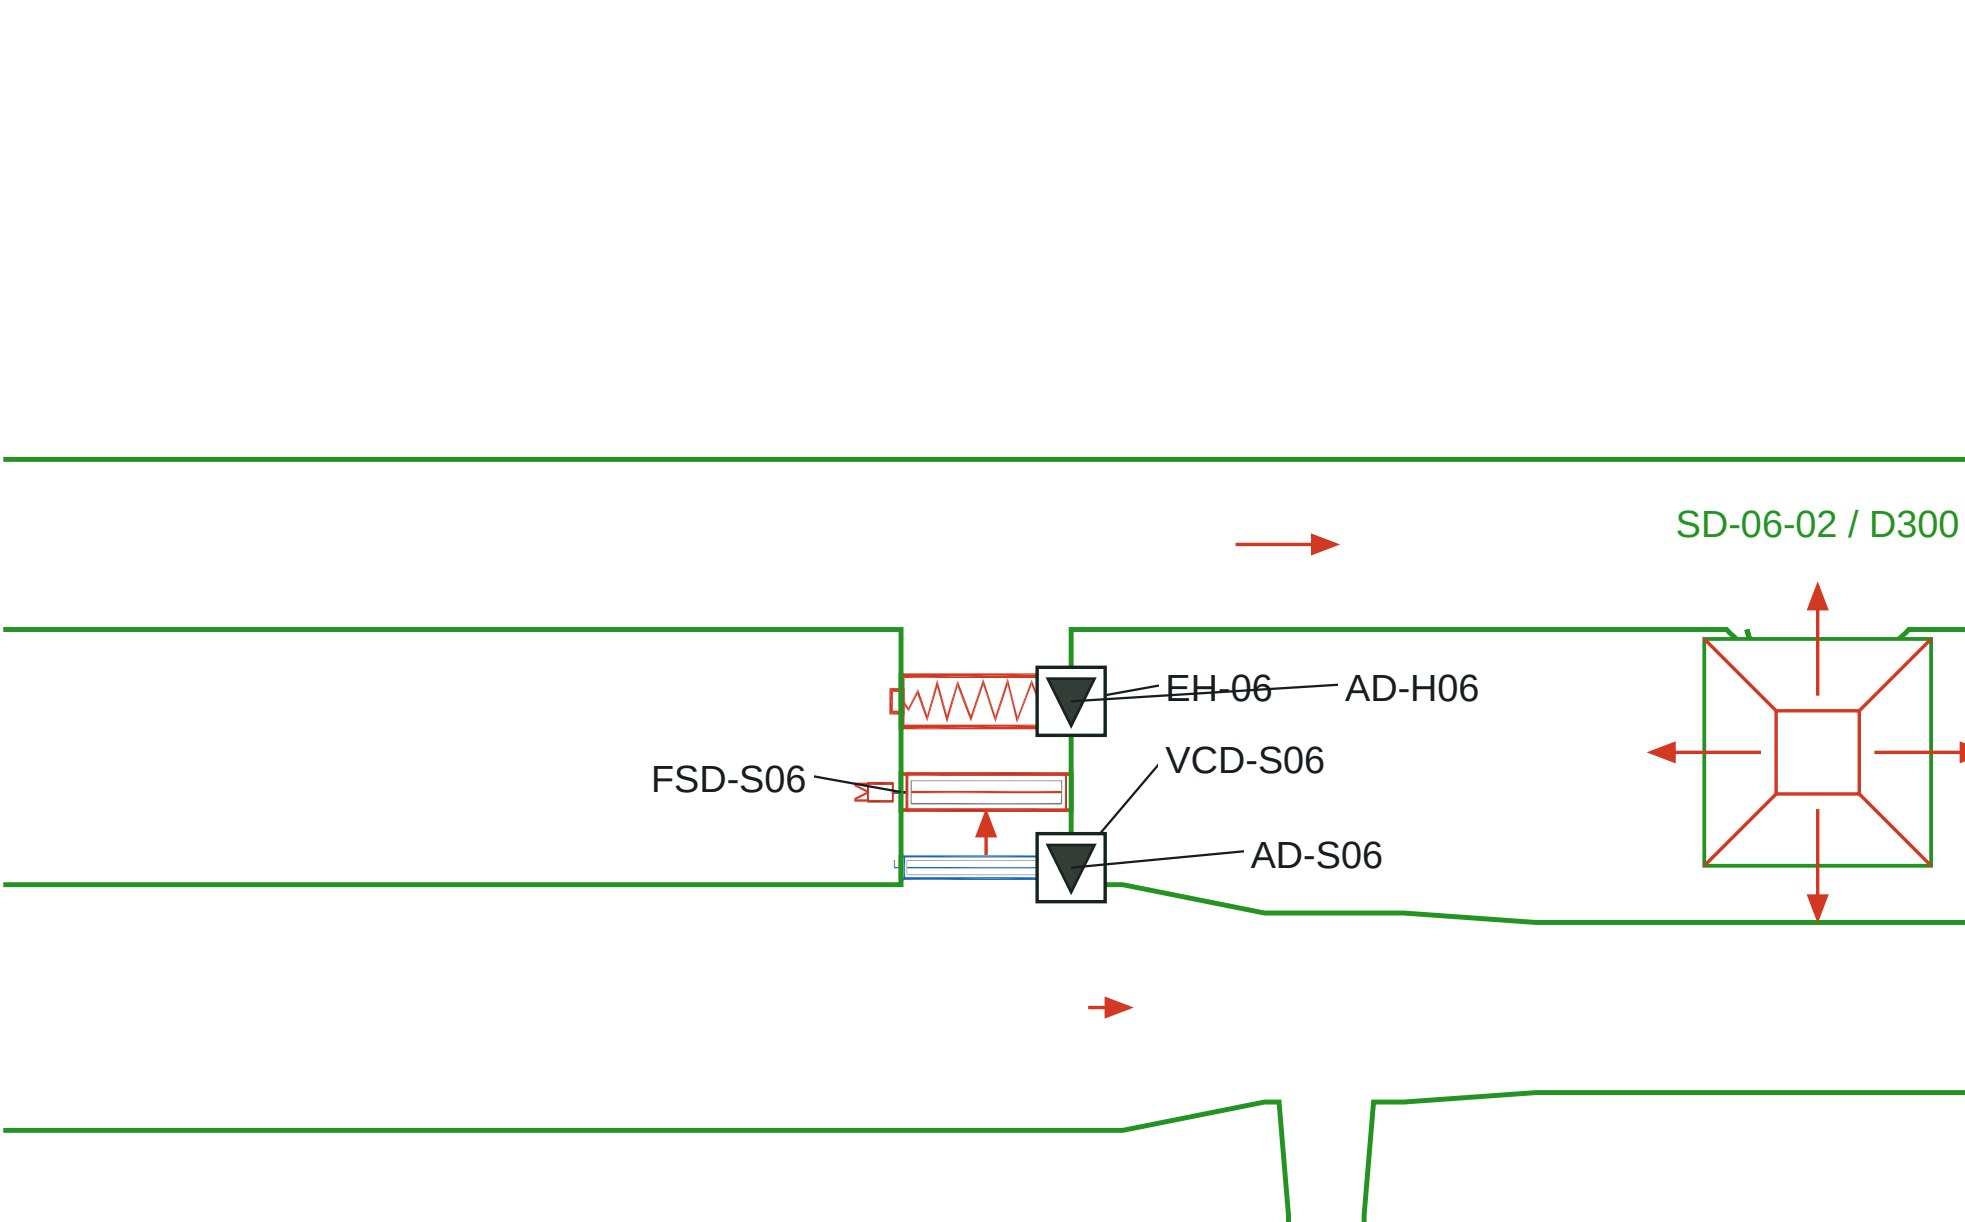

Actual Rev10 duct envelope; connected inside seams removed. Individual clear sizes and neck duties: Duct_sections / Terminals registers.

Formed fitting / access / face-to-face dimensions require selected manufacturer confirmation. Other services omitted in this enlargement; coordinate CX references on D-020.

F CORRIDOR COLLECTION / RETURN DEVICE STATION / 1:20

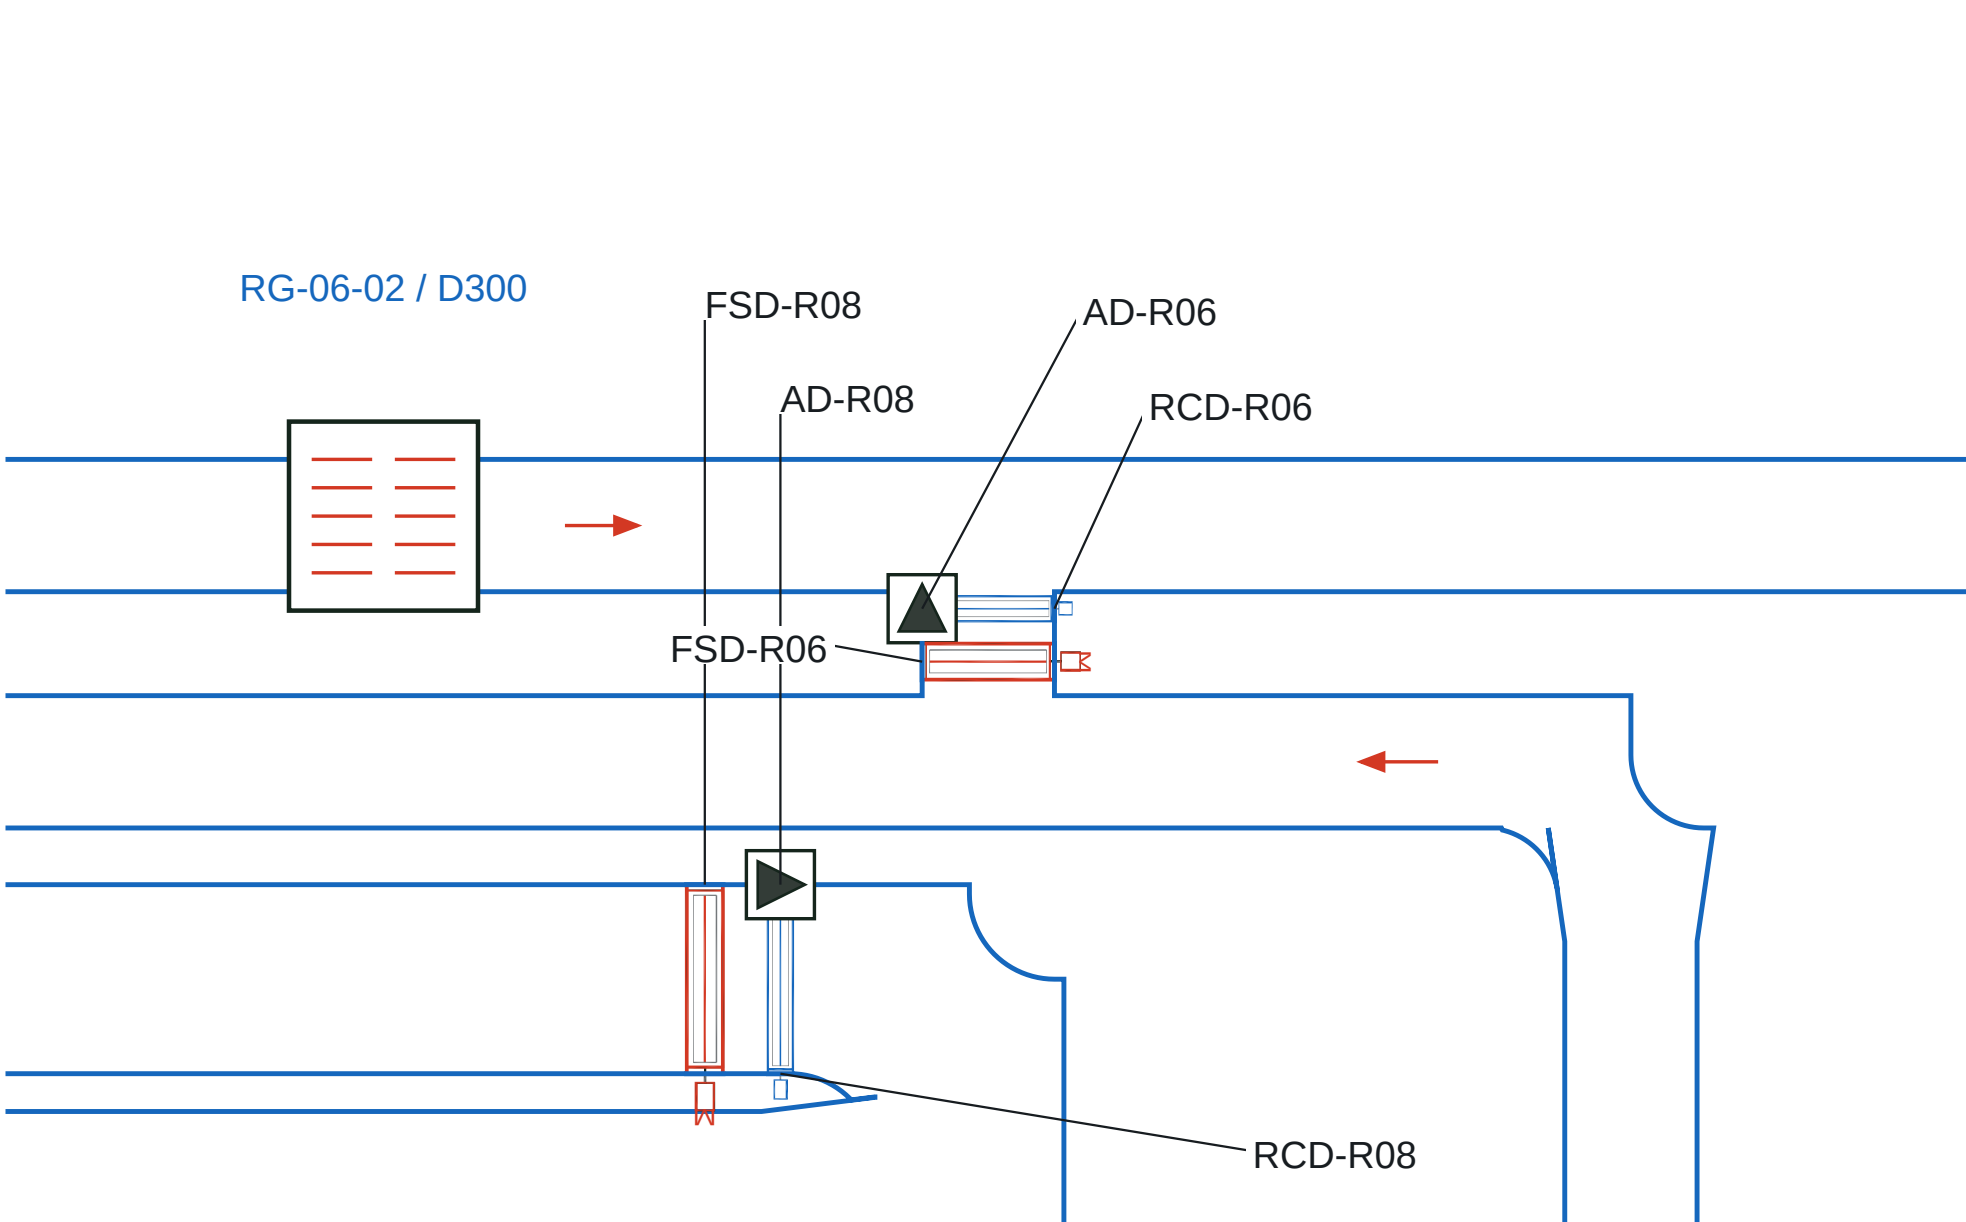

Actual Rev10 duct envelope; connected inside seams removed. Individual clear sizes and neck duties: Duct_sections / Terminals registers.

Formed fitting / access / face-to-face dimensions require selected manufacturer confirmation. Other services omitted in this enlargement; coordinate CX references on D-020.

These details are generated from the delivered routing geometry, not independent typical symbols. Continuous exteriors, flared necks and concave fitting throats are checked. Short necks use an integral plenum / vertical drop; their selected construction is pending.

TAQA TRANSMISSION

N-19082-RO-012 | PUMPING STATION STANDARDIZATION

ADMINISTRATION HVAC

DESIGN BASIS: C-H-SS-001 Rev0 / HAP REFERENCE

DRAWING TITLE

ACTUAL DUCT JUNCTIONS - ENLARGED PLAN DETAILS

FOR COORDINATION | CHECKED / APPROVED: PENDING

DRAWING NUMBER

ADM-HVAC-D-019

SCALE: AS SHOWN AT A1

REVISION

10

07 OCT 2026

SHEET 19 OF 21

ADMINISTRATION BUILDING - DUCT CROSSING REGISTER AND VERTICAL COORDINATION

NUMBERED SEPARATE-SERVICE CROSSINGS / D-001 TO D-006

CX	Upper / lower*	Upper duct sections	Lower duct sections	X, Y mm
CX-01	SA / RA	SA-R02-01	RA-M01	3500, 18000
CX-02	SA / RA	SA-B02	RA-M01 / RA-M02	3500, 16652.5
CX-03	SA / RA	SA-H02-D01	RA-B02	4800, 15500
CX-04	SA / RA	SA-R02-03	RA-M03	3500, 13100
CX-05	SA / RA	SA-R02-04	RA-H02-D01	6000, 13100
CX-06	SA / RA	SA-B05	RA-M03	3500, 12525
CX-07	SA / RA	SA-B05	RA-H02-D01	6000, 12525
CX-08	SA / RA	SA-M03	RA-M03	3500, 9475
CX-09	SA / RA	SA-B03	RA-H06-E01	17800, 8825
CX-10	SA / RA	SA-B07	RA-H06-D01	15500, 8812.5
CX-11	SA / RA	SA-B09	RA-H06-D01	13400, 8800
CX-12	SA / RA	SA-B08	RA-H06-L01	5700, 8762.5
CX-13	SA / RA	SA-B04	RA-M03 / RA-M04	4150, 8225
CX-14	SA / RA	SA-B08	RA-M04	5700, 8225
CX-15	SA / EA	SA-B03	EA-B09	17800, 7630.7
CX-16	SA / EA	SA-B07	EA-B09	15500, 7600
CX-17	SA / EA	SA-B01	EA-B09	19400, 7600
CX-18	SA / RA	SA-B04	RA-R04-01	4150, 7200
CX-19	SA / EA	SA-B01	EA-B03	19400, 5700
CX-20	SA / RA	SA-H08-D01	RA-R08-03	8500, 4600

* Proposed vertical order, not verified installed levels. Every crossing requires BOD, ceiling / structure, insulation and support clearance to be coordinated. No same-service intersection is concealed by this convention.


Dashed lower-service edges are limited to the actual overlap footprint. The upper duct remains continuous. CX-01 through CX-20 are searchable in CAD, PDF and Excel.

Structural underside: +4.000 m, user confirmed. Insulation: 50 mm indoor coordination assumption. Every crossing register includes the required stack and maximum local BOD bounds; these are not assigned duct elevations.

COORDINATION HOLD: 4.000 m structural underside confirmed; finished ceiling and duct BOD remain unassigned. Maximum local elevation bounds are calculated, not approved. Check the full crossing register and resolve CX-08 before construction.

CX-08 HEIGHT ENVELOPE - NTS / HOLD

STRUCTURAL UNDERSIDE +4.000 m (USER)

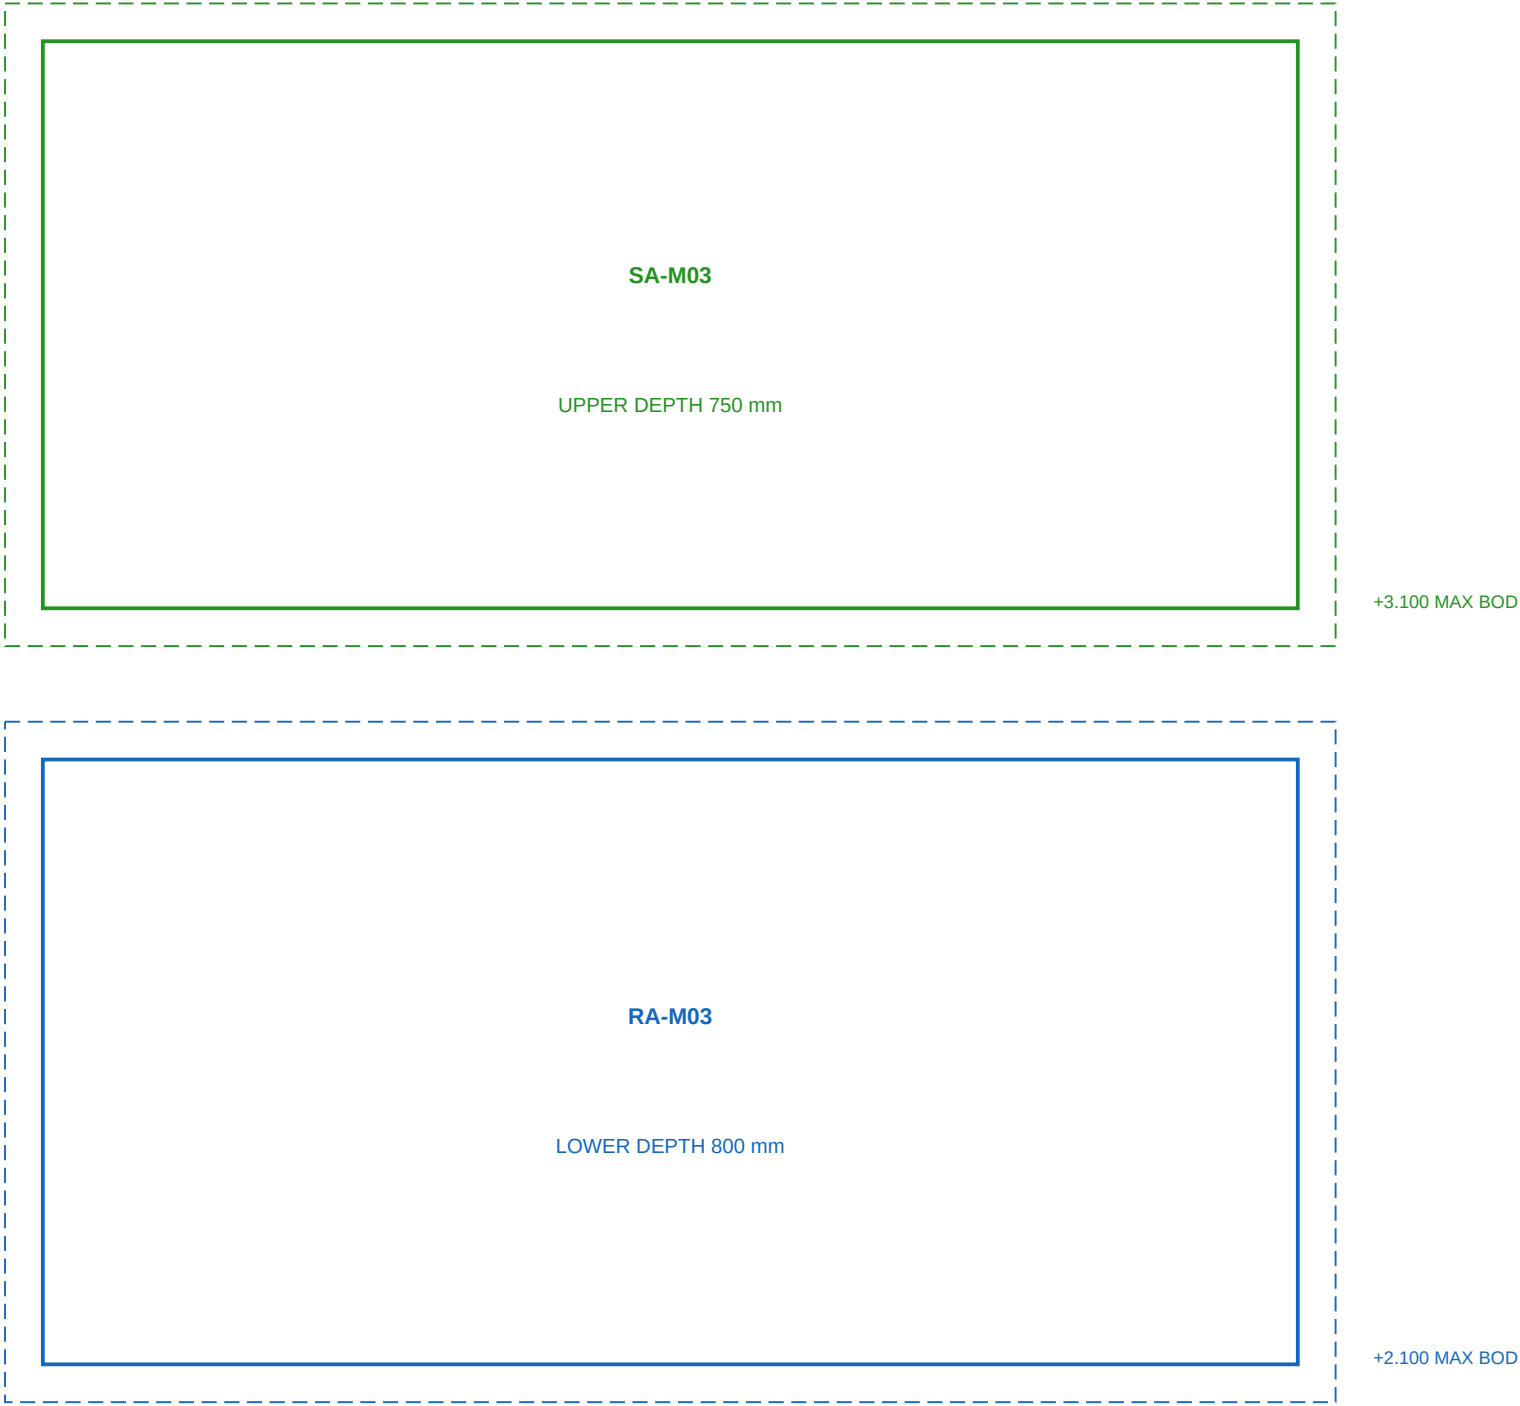

ASSUMED: 50 mm external insulation each duct; 100 mm gap between insulation; 100 mm structure / hanger allowance.

Required stack: 1950 mm. Lowest insulated surface: +2.050 m under those assumptions. Check finished ceiling and access before selecting any level.

CX-08 needs a shallower crossing section or reroute if the finished ceiling / access allowance cannot fit below this envelope. Recalculate width, velocity, transitions and fitting losses for the selected solution.

All BODs remain TBC. Local bounds are not a connected-network elevation design. Insulation is an explicit assumption, not a verified UAE standard. Actual beams, supports, OEM clearances and terminal plenums are not surveyed.

TAQA TRANSMISSION

N-19082-RO-012 | PUMPING STATION STANDARDIZATION

ADMINISTRATION HVAC

DESIGN BASIS: C-H-SS-001 Rev0 / HAP REFERENCE

DRAWING TITLE

DUCT CROSSING REGISTER AND VERTICAL COORDINATION

FOR COORDINATION | CHECKED / APPROVED: PENDING

DRAWING NUMBER

ADM-HVAC-D-020

SCALE: NTS AT A1

REVISION

10

07 OCT 2026

SHEET 20 OF 21

ADMINISTRATION BUILDING - REV10 TERMINAL MOVES AND DUCT SIZE CHANGES

PROPOSED TERMINAL RELOCATIONS - ROOM DUTIES UNCHANGED

Terminal	Old X, Y mm	New X, Y mm	L/s
RG-02-01	1200, 17000	5400, 17000	151.37
RG-02-03	1200, 11900	5400, 11900	151.37
SD-04-02	4300, 4300	4100, 4300	149.73
RG-04-01	700, 7000	700, 7200	129.95
RG-04-02	4900, 4300	5000, 4300	129.95
RG-08-01	5900, 7100	6400, 7150	137.54
RG-08-02	11200, 7100	11500, 7150	137.54
RG-08-04	11200, 4600	11500, 4600	137.54
RG-08-06	11200, 900	11500, 900	137.54
RG-05-01	9700, 18800	9900, 18800	143.67
RG-05-03	9700, 14600	9900, 14600	143.67
RG-05-05	15100, 10700	15100, 12000	143.67
SD-06-01	5400, 9800	5400, 10150	139.40
SD-06-02	14700, 9800	14700, 10150	139.40
SD-06-03	16300, 6000	16300, 10150	139.40
RG-06-01	3100, 8550	4500, 8875	89.72
RG-06-02	9700, 8550	9700, 8875	89.72
RG-06-03	17200, 8550	17200, 8875	89.72
RG-06-04	15100, 5600	16300, 8875	89.72
SD-09-01	13200, 7000	13600, 7000	23.10
SD-09-02	13200, 5200	13600, 5200	23.10
SD-01-01	18100, 3200	18100, 3000	141.30

The revised points are proposals. Coordinate all grille / diffuser faces against the reflected ceiling plan, lighting, access, throws and noise. Corridor terminals are returned to the corridor arrangement. Individual air duties, neck sizes and instrument allocations remain unchanged.

PROPOSED CLEAR DUCT SIZE REVISIONS

Section	Rev09 mm	Rev10 mm
SA-M03	950x500	650x750
SA-M04	850x425	650x575
RA-M03	850x550	600x800
RA-M04	800x450	600x600
RA-M05	650x300	350x575
RA-M06	450x225	350x300
SA-B04	450x300	350x400
RA-B08	700x450	500x650
RA-H08-U01	700x450	500x650
RA-H08-D01	700x450	500x650
RA-H08-D02	700x450	500x650
RA-B05	650x400	500x525
RA-H05-U01	650x400	500x525
RA-H05-U02	650x400	500x525
RA-H05-U03	650x400	500x525
RA-H05-D01	650x400	500x525
RA-B06	550x350	350x550
RA-H06-D01	550x350	350x550

Narrower / deeper sections separate the plan tracks. Areas and velocities are recalculated; the largest proposed depth is 800 mm. Available ceiling space, both height and width transitions, selected loss coefficients and fan ESP require verification.

ROUTING AND GEOMETRY CHECKS

122 scheduled section paths; every joint conserves its registered airflow.

No duplicated same-service centerline and no unintended same-service polygon intersection.

Separate main / corridor collection tracks; shared runs are sized headers, not coincident individual runouts.

Continuous service exteriors; tapers replace the original throat; local formed fitting radii are shown.

20 separate-service crossings are indexed on D-020; elevations remain pending.

85 instrument tags and the existing I/O duties are retained.

TAQA TRANSMISSION

N-19082-RO-012 | PUMPING STATION STANDARDIZATION

ADMINISTRATION HVAC

DESIGN BASIS: C-H-SS-001 Rev0 / HAP REFERENCE

DRAWING TITLE

REV10 TERMINAL MOVES AND DUCT SIZE CHANGES

FOR COORDINATION | CHECKED / APPROVED: PENDING

DRAWING NUMBER

ADM-HVAC-D-021

SCALE: NTS AT A1

REVISION

10

07 OCT 2026

SHEET 21 OF 21